


# RH1610 RESPONDER™ CONSOLE WIRE SCHEMATIC

MINSTAR PATENTED TECHNOLOGY



**FOR USE WITH  
F/S SS2000 SYSTEMS**

F/S and SS2000 are trade marks of FEDERAL SIGNAL Company



NOTE: WIRE PIN OUT IS REVERSED ON MASTER CONTROL RJ11 CONNECTOR, 1-OR/WH, 2-BL, 3-BL/WH, 4-OR

See Schematic  
RH1610 MAIN

CAT 3 DATA CABLE

RADIO SPEAKER

18G. PR REBROD SPK  
18G. BL REBROD SPK

8G. BK GND

16G. OR AUX 1

14G. RD AUX 8  
16G. RD/WH CNTL 12V  
12G. RD AUX 10  
14G. RD AUX 11  
14G. RD AUX 12  
14G. RD AUX 13  
14G. TN CON SPR 1  
14G. TN CON SPR 2  
14G. TN CON SPR 3  
14G. GY/WH FRT SPR  
18G. PR REBROD SPK  
18G. BL REBROD SPK

14G. TN CON SPR 1 SPARE 1







14G. TN CON SPR 2 SPARE 2

14G. TN CON SPR 3 SPARE 3

14G. GY/WH FRT SPR FRONT SPR

Write in what spare wire is used for.

CUSTOMER WORK AREA FOR SPARE CIRCUITS

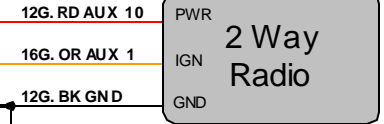

WIRE COLORS
Red - Hot
Orange - Ignition
Gray - Relay Control
Black - Ground

IGNITION SIGNAL
AUX 1 is intended as a low current ignition signal. Not for use as power.